



EN - Quick start guide

Get to Know FIVERAY F100

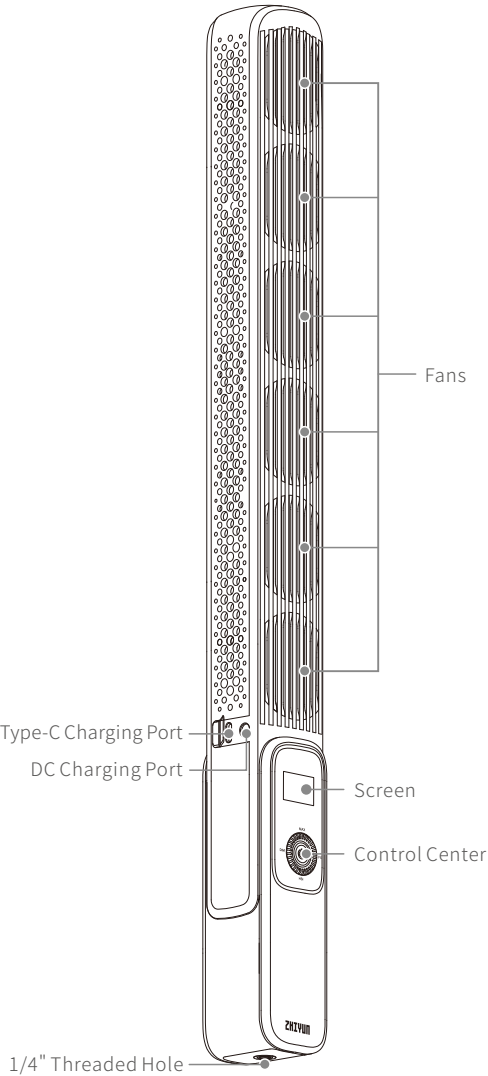


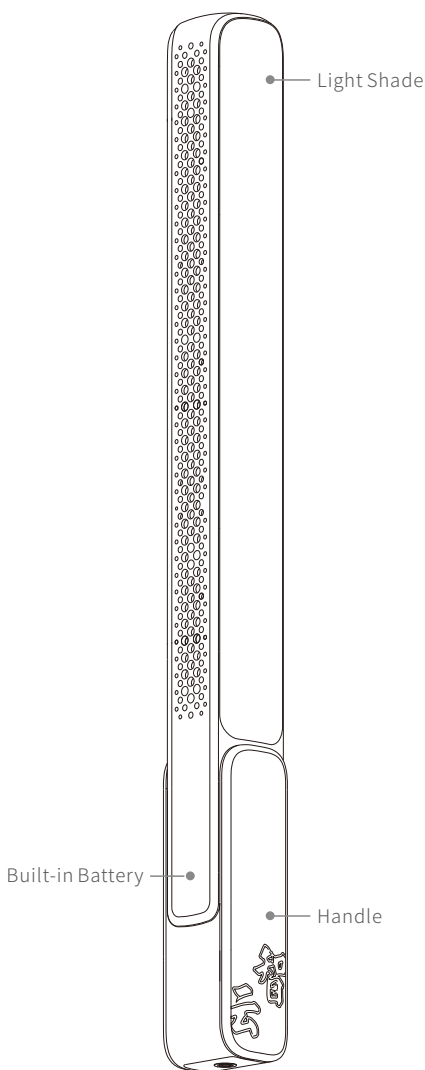

How to Charge

FIVERAY F100 adopts high-capacity built-in lithium battery, providing a solidly long runtime. The battery level is displayed on the screen. The following methods show how to charge your FIVERAY F100:

- ① Use Type-C cable to connect USB chargers to the Type-C port of FIVERAY F100, and plug the USB charger into an AC socket. It is recommended to use USB chargers that meet the PD protocol (support 100W at most).
- ② Connect the TransMount 120W Power Adapter to the DC charging port and the AC socket to charge FIVERAY F100.

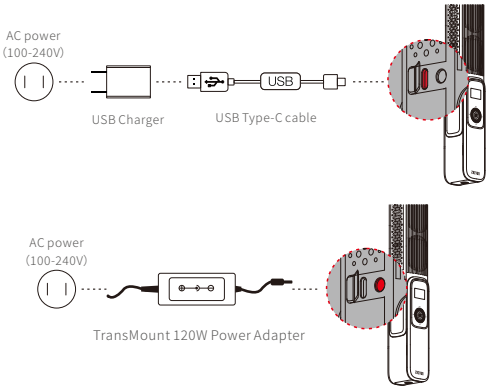

Note: USB charger and USB cable that supports 100W fast charging are not included in the package. FIVERAY F100 COMBO offers a TransMount 120W Power Adapter.

How to Use ZHIYUN FIVERAY F100

1.Buttons

①DIM Mode Button:

Single press:
Enter brightness adjustment interface under CCT mode.
Switch between brightness/color temperature (brightness adjustment interface).

②Dial:

Adjust parameters.
Switch light effect types (light effect interface).

③HSI Mode Button:

Single press: Enter HSI Full-color interface.
Switch among Hue (H)/Saturation (S)/Intensity (I) (HSI Full-color interface)

④Max Power Button:


Single press to enable/disable full power (CCT mode).

⑤Power/Parameter Switch:

Long press: Power on/off.
Double press:
Quick adjustment of brightness/color temperature (CCT mode).
Quick adjustment of Hue (H)/Saturation (S)/Intensity (I) (HSI mode).
Quick adjustment of brightness (FX Light Effect mode).


⑥FX Light Effect Mode Button:

Single press:
Enter the light effect adjustment interface under FX Light Effect mode.
Switch between brightness/light effect (light effect adjustment interface).



2. Brightness/Color Temperature Settings (CCT Mode)

You can adjust brightness/color temperature in CCT mode. Single press DIM Mode Button to enter CCT mode. Double press power/parameter switch for quick adjustment of brightness/color temperature. Rotate the dial to tune the brightness/color temperature value. Please adjust the brightness/color temperature to a proper value according to actual use.



💡 You don't have to change the mode if the light stick is in CCT mode when first powered on or at the last shutdown.

3. Hue (H)/Saturation (S)/Intensity (I) Settings (HSI Mode)


You can adjust hue/saturation/intensity in HSI mode. Single press HSI Mode Button to enter the mode. Double press power/parameter switch for quick adjustment of hue/saturation/intensity. Rotate the dial to tune the hue/saturation/intensity value. Please adjust the hue/saturation/intensity to a proper value according to actual use.



💡 You don't have to change the mode if the light stick is in HSI mode at the last shutdown.

4. FX Light Effect Settings


You can adjust the light effect type and brightness in FX Light Effect mode. Single press the FX Light Effect mode button to enter the mode. Select the light effect type setting and rotate the dial to select a type. Select the brightness setting and double press power/parameter switch for quick adjustment of brightness. Rotate the dial to tune the brightness value. Please adjust the brightness/light effect type according to actual use.



💡 You don't have to change the mode if the light stick is in FX Light Effect mode at the last shutdown.

5. Max Power Settings

When the light stick is powered on, single press the DIM Mode Button to enter CCT mode, and single press MAX Power Button to enable max power. The light stick will then be in max power output. Double press power/parameter switch for quick adjustment of brightness/color temperature under max power output. Rotate the dial to tune the brightness/color temperature value under max power output. Please adjust the brightness/color temperature to a proper value according to actual use.



💡 You don't have to change the mode if the light stick is in CCT mode when first powered on or at the last shutdown.

Disclaimer and Warnings

Thank you for purchasing FIVERAY F100. The information contains herein affects your safety, legitimate rights and obligation. Please read this instruction carefully to ensure proper configuration before use. Failure to read and follow this instruction and warnings herein may result in serious injury to you or bystanders, or damage to your device or property. Guilin Zhishen Information Technology Co., Ltd (hereinafter referred to as "ZHIYUN") reserves all rights for final explanation of this instruction and other documents related to FIVERAY F100. The information is subject to update without notice. Please visit www.zhiyun-tech.com to obtain the latest product information.

By using this product, you hereby signify that you have read this document carefully and that you understand and agree to abide by the terms and conditions herein. You agree that you are solely responsible for your own conduct while using this product, and for any consequences thereof. You agree to use this product only for purposes that are proper and in accordance with all terms, precautions, practices, policies and guidelines ZHIYUN has made and may make available.

ZHIYUN accepts no liability for damage, injury or any legal responsibility incurred directly or indirectly from the use of this product. Users shall observe safe and lawful practices including, but not limited to, those set forth herein.

ZHIYUN™ is the trademark of Guilin Zhishen Information Technology Co., Ltd and its affiliates. All product names or trademarks referred to herein are trademarks or registered trademarks of their respective holders.

Reading Tips

Legends: 💡 Hints and Tips ⚠ Important

Warnings

Read the ENTIRE User Guide to become familiar with the features of this product before operating. Failure to operate the product correctly can result in damage to the product or personal property and cause serious injury.

This is a sophisticated product. It must be operated with caution and common sense and requires some basic mechanical ability. Failure to operate this product in a safe and responsible manner could result in injury or damage to the product or other property. This product is not intended for use by children without direct adult supervision.

DO NOT use with incompatible components or in any way otherwise as mentioned or instructed in the product documents provided by ZHIYUN. The safety guidelines herein contain instructions for safety, operation and maintenance. It is essential to read and follow all of the instructions and warnings in the User Guide, prior to assembly, setup or use, in order to operate the product correctly and avoid damage or serious injury.

Safe Operation Guidelines

1. This product is a high-precision control device. Damage may be caused to FIVERAY F100 if dropped or subject to external force, and this may result in malfunction.
2. This product is not waterproof. Prevent contact with any kind of liquid or cleaner with the FIVERAY F100. Never use the product in the rain or a humid environment.
3. It is recommended to keep your hands dry while using FIVERAY F100 and use dry cloth for cleaning.
4. Keep this product out of the reach of children.
5. Protect FIVERAY F100 from dust and sand during use.
6. Do not disassemble this product personally. In the event of malfunctions, it should be repaired by ZHIYUN or authorized maintenance personnel.
7. Do not expose this product to corrosive chemicals, inflammable and explosive materials, or hot temperature.

WARNING: To avoid fire, serious injury, and property damage, observe the following safety guidelines when using, charging, or storing your batteries.

1. Prevent the batteries from coming into contact with any kind of liquid. Do not leave batteries out in the rain or near a source of moisture. Do not drop the battery into water. If the inside of the battery comes into contact with water, chemical decomposition may occur, potentially resulting in the battery catching on fire, and may even lead to an explosion.
2. If the battery catches fire, use sand or dry powder fire extinguisher immediately to put out the fire.
3. Never use non-ZHIYUN batteries. If replacement or backup is needed, please purchase new batteries from ZHIYUN's official website or authorized channels. ZHIYUN takes no responsibility for any damage caused by non-ZHIYUN batteries.
4. Never use or charge swollen, leaky, or damaged batteries. Never use or charge if the battery smells, or overheats (exceeding the maximum temperature of 160 ° F/71 ° C). If your batteries are abnormal, contact ZHIYUN or a ZHIYUN authorized dealer for further assistance.
5. The battery should be used within the temperature range from -10° C to 45° C. Use of battery in environments above 45° C may lead to a fire or explosion. Use of battery below -10° C may lead to serious battery damage.
6. Do not use the battery in strong electrostatic or electromagnetic environments. Otherwise, the battery protection board may malfunction.
7. Do not disassemble or use any sharp object to puncture the battery in any way. Otherwise, the battery may leak, catch fire or explode.
8. Do not mechanically strike, crush, or throw the battery. Do not place heavy objects on the battery or charger.
9. Electrolytes inside the battery are highly corrosive. In case of accidental contact of any electrolytes with your skin or eyes, rinse immediately with water for at least 15 minutes and seek medical advice as soon as possible.
10. Do not use the battery if it has been involved in a crash or heavy impact.
11. Do not heat the battery and never put the battery in a microwave oven or in a pressurized container.
12. Do not place the battery on a conductive surface (such as a metal desk surface, eyeglasses, watch, jewelry, etc.)
13. Prevent use of wires or other metal objects that could cause positive and negative short-circuit to the battery.

Battery Charging

1. Do not put the battery and charger near flammable materials or on flammable surfaces (such as carpet or wood). Never leave the battery unattended during charging to prevent any accidents.
2. Please disconnect the battery and the charger when fully charged.
3. Do not charge the battery immediately after use, because the battery temperature may be too high. Do not charge the battery until it cools down to normal room temperature. Charging the battery with its temperature over 45° C or lower than 0° C may lead to leakage, overheating, or damage.

Battery Storage

1. Keep batteries out of the reach of children and pets.
2. Do not leave the battery near heat sources such as a furnace or heater, or inside of a vehicle on hot days. Never expose the battery in any environment with temperature of over 60° C. The ideal storage temperature is 22° C-28° C.
3. Store batteries in a dry environment.
4. Do not leave the battery unused for too long after it has been completely discharged to prevent over-discharge of battery which may result in battery damage and permanent failure.

Battery Maintenance

1. Do not over-charge or over-discharge the battery, which will damage the battery;
2. The battery performance will be affected for not being used for a long time;
3. Never use the battery when the temperature is too high or too low;
4. Do not store the battery where the ambient temperature exceeds 60°C.
5. Recharge and discharge every 3 months to keep the battery active.

Battery Disposal

Please fully discharge the battery before putting it in the designated recycling bin. Batteries contain hazardous constituents and it is forbidden to put the battery in general waste bin. For related details please abide by the local laws and regulations on battery recycling and disposal.

Warranty Period

1. Customers are entitled to replacement or free repair service in case of quality deficits found in the product within 15 days upon receipt of the product.
2. Customers are entitled to free repair service from ZHIYUN for any product proven defective in material or workmanship that results in product failure during normal consumer usage and conditions within the valid warranty period, which is 12 months counting from the date of selling. However, warranty period varies by product component and country of purchase. Please contact our after-sales service team on ZHIYUN official website or your place of purchase for detailed warranty information.

Warranty Exclusions

1. Products subjected to unauthorized repair, misuse, collision, neglect, mishandling, soaking, accident, and unauthorized alteration.
2. Products subjected to improper use or whose labels or security tags have been torn off or altered.
3. Products whose warranty has expired.
4. Products damaged due to force majeure, such as fire, flood, lightning, etc.

Warranty Claim Procedure

1. If failure or any problem occurs to your product after purchase, please contact a local agent for assistance, or you can always contact ZHIYUN's customer service through email at info@zhiyun-tech.com or website at www.zhiyun-tech.com.
2. Your local agent or ZHIYUN's customer service will guide you through the whole service procedure regarding any product issue or problem you have encountered. ZHIYUN reserves the right to reexamine damaged or returned products.

Scan the QR code below to know more about our products.



Official website



Facebook
(Zhiyun Tech)



Facebook
(Zhiyun Support)



Instagram



YouTube

Quality Certificate

Please download the latest version from www.zhiyun-tech.com

This document is subject to change without notice.

ZHIYUN™ are the trademark of ZHISHEN.

Copyright © 2022 ZHISHEN. All rights reserved.

Tel: +86 400 900 6868

USA Hotline: +1 808-319-6137, 9:00-18:00 GMT-7, Mon-Fri

Europe Hotline: +49 (0)6101 8132 180, 10:00-17:00 GMT+1, Mon-Fri

Email: info@zhiyun-tech.com

Website: www.zhiyun-tech.com

Address: 09 Huangtong Road, Tieshan Industrial Zone, Qixing District, Guilin, 541004, Guangxi, China.



If at any time in the future you should need to dispose of this product please note that: Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice. (Waste Electrical and Electronic Equipment Directive)