

ZHIYUN



# FIVERAY F100

Let Your Creativity Shine | 100W Pro Light Stick

The Zhiyun logo is a red square with the word "ZHIYUN" in white, uppercase letters.

# 100W with Two-Way Cooling

Reach up to 20708 lux at its 100W max power, satisfying various professional shooting scenarios.

Intelligent temperature control and overheat protection can quickly bring down the heat.

A Zhiyun light fixture is shown in the bottom left corner, angled upwards. It has a black body with a silver-colored heat sink area featuring a circular pattern. A digital display on the front shows "5500K" and "100%". A blue, ethereal glow emanates from the fixture, forming two overlapping circles that represent the cooling effect.

## 6 FANS + RADIATOR

\* The fans are enabled automatically when the power exceeds a certain level. The MAX mode is the full power mode. Under MAX mode, when the brightness value is 100%, the power output reaches its peak.

ZHIYUN

# Get the Perfect Color

Give you true-to-life color rendition and high brightness with the RGB increased by **47%**.

CRI  $\geq$  96    TLCI  $\geq$  97

H: 0-360°    S: 0-100%    I: 0-100%





ZHIYUN

# Dual Color Temperature



Your true color deserves to be seen. F100 offers precise adjustment of color temperature from 2700K-6500K in CCT Mode.

ZHIYUN

# Versatile Extension Available



The 1/4" screw hole allows F100 to be mounted on the holder, H stand, tripod and light stand, fitting in various filming settings.



# Versatile Extension Available



Offer stick light modifiers, 2-leaf barn doors, diffuser and grid for more professional lighting.



ZHIYUN

# Let Your Creativity Shine

Support multiple creative FX lighting effects.



TV



Fire



Lightning



Faulty  
Bulb



SOS



Candle

ZHIYUN



**100W**

PD Fast Charge

# Dual Charging Solution

6 built-in 2600mAh batteries ensure 1 h 4 m runtime at 50W working power.

Upgraded circuit allows F100C to work at high power while being charged.



**120W**

DC Charge


\*The product can run 5h40min at 10W, 2h10min at 25W, and 30 min at 100W. The above data is gathered from internal experiments of ZHIYUN laboratories. Under different scenarios, data is different to some extent. Please refer to the actual use.



# *#NoCOB, NoProblem*

Reference:

<https://www.instagram.com/p/CdLEdtXDspZ/>  
(Inspired by #nodronenoproblem)

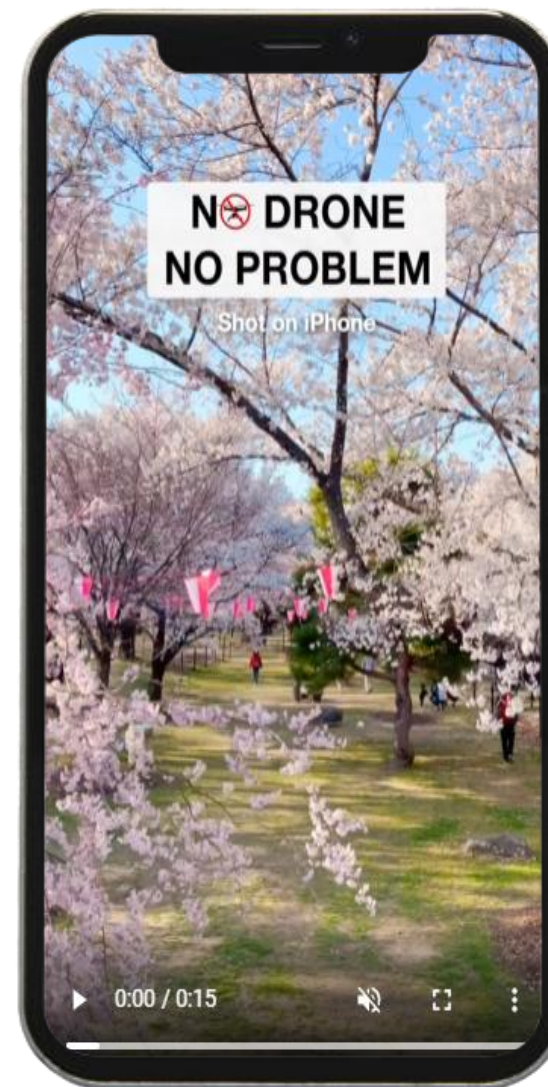

# *#LightingHacks*

# *#One-Light Hacks*

Reference:

<https://www.youtube.com/watch?v=1KiVTUZRxsk>

<https://www.youtube.com/watch?v=fSLZU-EDn-c>




# *#Budget Lighting Tips*

Reference:

<https://youtu.be/cmniNXH1uT0>

[https://www.youtube.com/watch?v=i\\_vnl9NyFRc](https://www.youtube.com/watch?v=i_vnl9NyFRc)

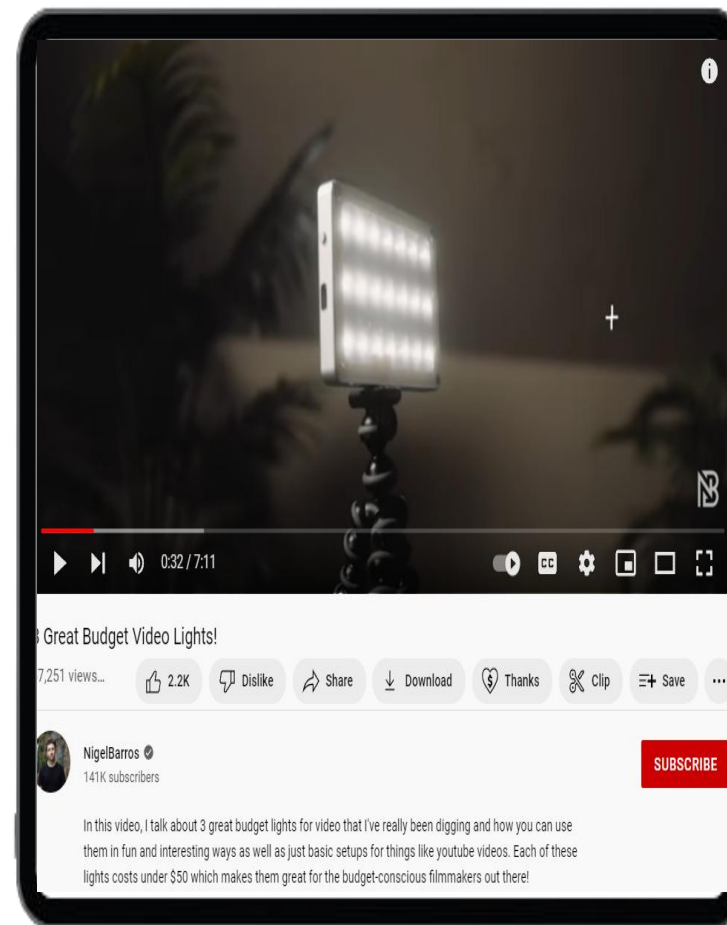




# #OutputIsKing

Reference:

<https://www.youtube.com/watch?v=laAulyeSNXQ&t=189s>

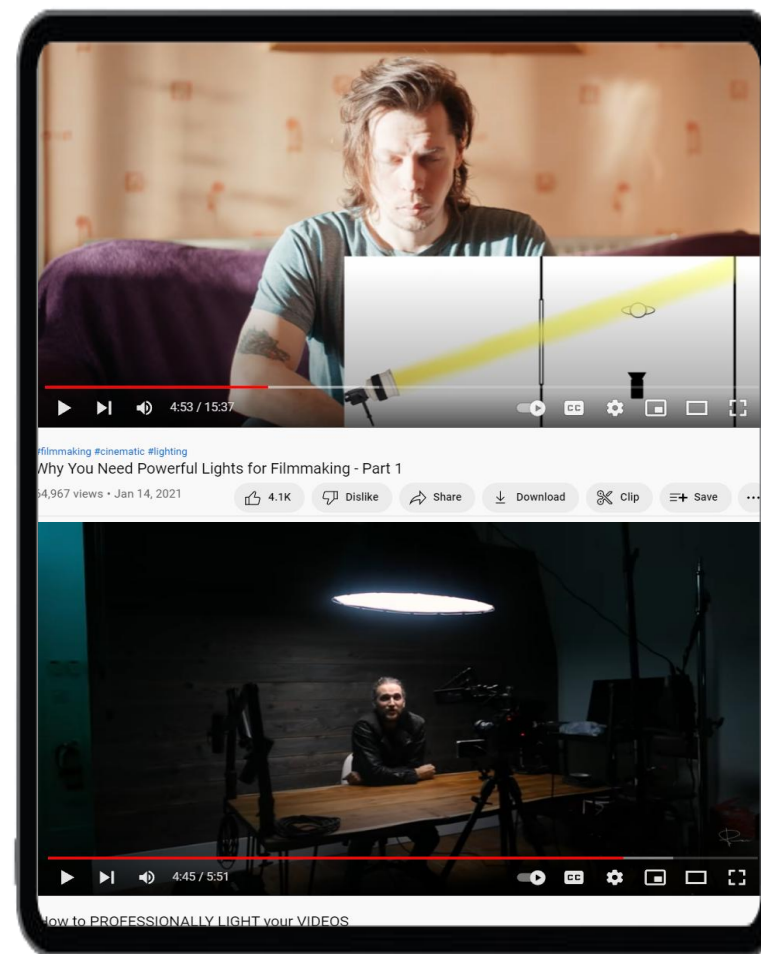



FR100C



F100

Peak Power 100W	POWER	Peak Power 100W
2700K - 6200K	COLOR TEMPERATURE	2700K - 6200K
≥96	CRI	≥96
≥97	TLCI	≥97
16W	RGB POWER	30W
28W	PD FAST CHARGE	100W
/	ACCESSORIES	2-Leaf Barn Doors, Diffuser, Grid
/	LIGHTING EFFECT	FX Light Effects